

Freezing Point Determination Device made by Funke-Gerber
1000 times tried and tested – exact – robust – reliable

CryoStar I

- **Automatic Cryoscope**
- Single sample device
- Reference method DIN/ISO/IDF 5764
- Big Touch Screen
- New Cooling-System
- Easy to use, fast, exact and robust




CryoStar I

**FUNKE
GERBER**

With the Cryostar the freezing point of milk can be measured quickly and reliably.


Specifications:

- **Designed for the future, flexible:** Fixed time measurement, plateau and maximum search functions. You can freely program all relevant parameters. These will of course be recorded. And the **CryoStar** can also be set to conform with all national and international standards (including future ones).
- **Easy to use:** The operation is menu guided on the touch screen in the language of your choice. German and English are currently available.
- **Sure Performance:** The reliable cooling system ensures rapid operational readiness even in high-temperature environments (max. approx. 34°C).
- **Fast:** Depending on actual setting used, up to 40 samples can be measured per hour.
- **Versatile:** The **CryoStar** is equipped with a serial connection for standard printers and a USB port for connections to a PC. Measured values can be saved on a USB-drive for further processing.
- **Handy:** The **CryoStar** is small, light and easy to handle. The percentage of added water content is directly displayed and printed. The calibration is carried out automatically. All settings and calibration values are retained in a non-volatile memory.

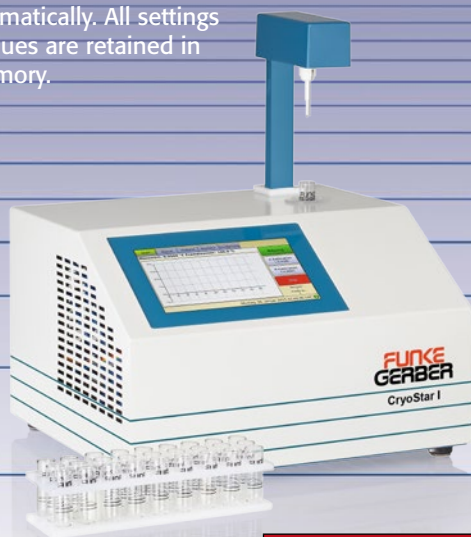

Technical Data:

Supply:	230V/115 V AC (50...60 Hz), 180 VA
Measuring resolution:	0,0001°C (0,1 m°C)
Repeatability:	± 0,0020°C (± 2,0 m°C)
Measuring range:	0,0000°C to -1,5000°C
Sample volume:	2,0 ml to 2,5 ml
Sample rate:	up to 40/h typically 30/h
Interfaces:	2x serial, 2x USB, Ethernet
Cooling-off time:	approx. 15 Min.
Display:	7" graphic color touch display, showing freezing curve, measurement result [°C], [% added water] date, time, measuring conditions
Record Print:	measurement result [°C], [% added water] date, time, measuring conditions

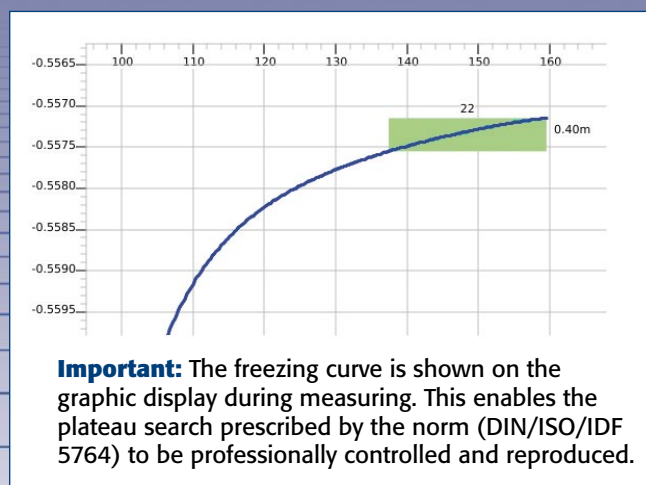

Ordering Data/Name	Dimensions (W x D x H)	Weight (net)	Art. No.
CryoStar I	34 x 33 x 29 cm	8,7 kg	7150

Accessories/Name	Art. No.	Accessories/Name	Art. No.	Accessories/Name	Art. No.
Thermo-record Printer	7151	Calibration Standard A (0,000°C)	7165	Calibration Standard C (-0,512°C)	7188
Replacement Thermistor	7172	Calibration Standard A (-0,408°C)	7186	Automatic-Pipette, 2 ml	7174
Sample Vials (50 units.)	7167	Calibration Standard B (-0,557°C)	7166	Pipette Tips	7175
Cooling bath fluid, 500 ml	7169	Calibration Standard B (-0,600°C)	7187	rapid freezing tube	7167-A

Freezing Point Determination Device
made by Funke-Gerber
1000 times tried and tested
exact – robust – reliable

**FUNKE
GERBER**

Funke-Dr.N. Gerber Labortechnik GmbH
Ringstraße 42 · D-12105 Berlin
Fon: (+49 30) 702 006-0 · Fax: (+49 30) 702 006-66
kontakt@funke-gerber.de · www.funke-gerber.de